


## TECHNICAL PERFECTION

Evoke is the ultimate no-compromises, take-no-prisoners road racer. Stiff and efficient, and in a full range of seven sizes, 47-62 cm, for perfect fit that maximizes your performance.

This year sees the production debut of the Evoke SL - same benchmark rigidity and brutally efficient power transfer, but crafted from high-modulus carbon that makes it a sub-kilo machine. It's a flyweight package with a heavyweight punch.

The perfect road-racing chassis deserves the ultimate buildup. Kitted out with our trusted, superlight carbon bars and the best components money can buy. No excuses, just pure go-fast technology.

### firestorm

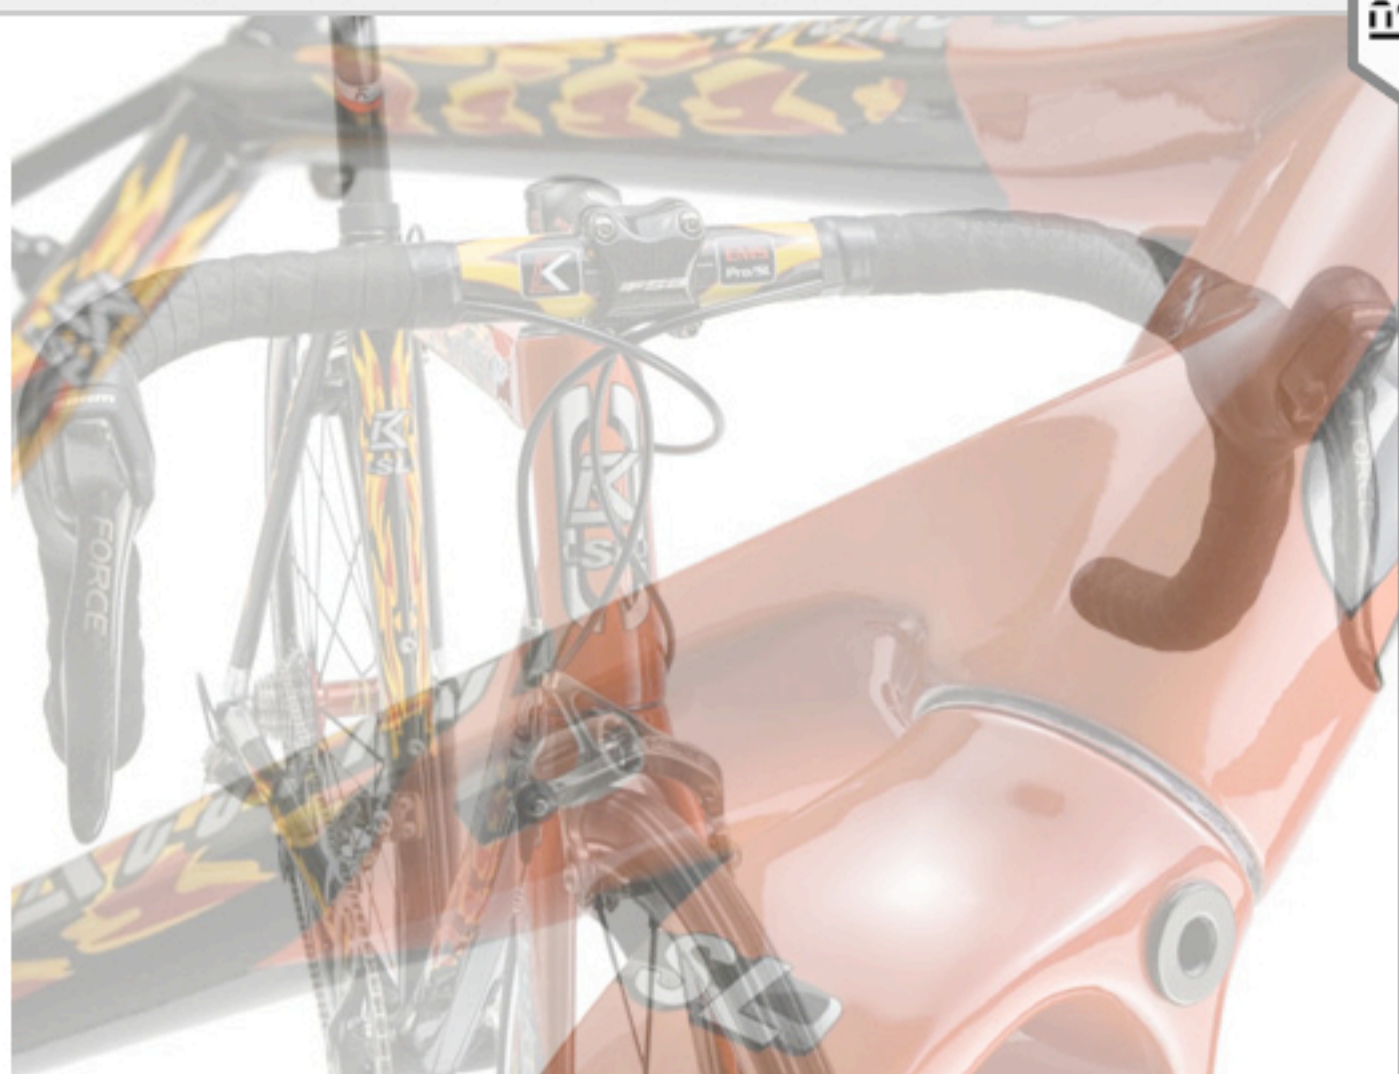

01 02 03 04 05 06 07

ROAD

TRI

MTN

FORKS

BARS

TECH

ABOUT

DEALERS

SUPPORT

FAQ

NEWS

STORE

## THE POWER PICTURE

- » Computer-optimized cross-sectional profiles and shapes throughout, for pedaling stiffness with ride compliance
- » Semi-sloping top tube for less material weight, improved stiffness and lower center of gravity
- » One-piece Modular Monocoque main triangle
- » Ride-tuned stays and fork, for perfect handling balance and feel
- » Structurally integrated head tube, bottom bracket and rear dropouts for wicked-fast power transfer
- » Kestrel-exclusive 800ksi high-modulus carbon, for a flyweight frame that performs and rides like the benchmark Evoke. Exactly.

### DETAILS

- > Slotted cable stops
- > Quick-change dropouts for smooth wheel changes
- > Semi-integrated headset for a low profile, optimal stiffness and full replaceability
- > Full external cable routing
- > Replaceable derailleur hanger

## EVOKE SL BUILDS

### SRAM FORCE - \$6299 US msrp

- » 10-speed gear selection with DoubleTap Shifter technology
- » Force carbon cranks and levers

### SHIMANO DURA-ACE - \$5499 US msrp

- » The TdF-proven performance standard
- » FSR SL-K carbon cranks
- » Standard and compact (50/36T) chainring options

### FRAMESET ONLY - \$2799 US msrp

## GEOMETRY & SPECS

Size, center-center	47	50	52	54	56	59	62	cm
Standover	72.2	74.1	75.8	77.5	79.3	82.4	85.2	cm
Top Tube	50.0	52.0	53.5	55.0	56.5	58.7	60.5	cm
Head Angle	72.00	72.50	72.75	73.00	73.25	73.75	74.00	degrees
Seat Angle	75.50	75.00	74.25	73.50	73.00	72.75	72.50	degrees
BB Height	10.3	10.3	10.4	10.4	10.4	10.5	10.5	in
Chainstay	41.0	41.0	41.0	41.0	41.0	41.0	41.0	cm
Head Tube Length	90	103	118	134	152	182	210	mm
Fork Rake	4.8	4.8	4.8	4.3	4.3	4.3	4.3	cm
Drop	7.3	7.3	7.1	7.1	7.1	6.8	6.8	cm
Trail	5.8	5.5	5.4	5.7	5.6	5.3	5.1	cm
Front Center	56.2	57.5	58.2	58.3	59.0	60.5	61.7	cm
Wheelbase	96.0	97.4	98.1	98.2	99.0	100.6	101.8	cm
Fork	Evoke SL/Ti 1-1/8", integrated							
Front Der.	braze-on							
Bottom Bracket	68 mm, English							
Seatpost	32.4 mm round							
Construction	Kestrel Modular Monocoque							
Material	800k High-Modulus carbon fiber							
Frame Weight	960 g							

EVOKE SL TECH

CARE SHEET

CATALOG

HIGH-REZ IMAGE